

WHEN EXCELLENCE
MATTERS



The world of high performance roof underlayments

RKW | RoofTopGuard®



LIGHTWEIGHT



HIGH GRIP
NO SLIP



WEATHER
RESISTANT



EASY
INSTALLATION



6 months


UNCOVERED
EXPOSURE



YEAR
LIMITED
WARRANTY



SAVE
TIME & MONEY

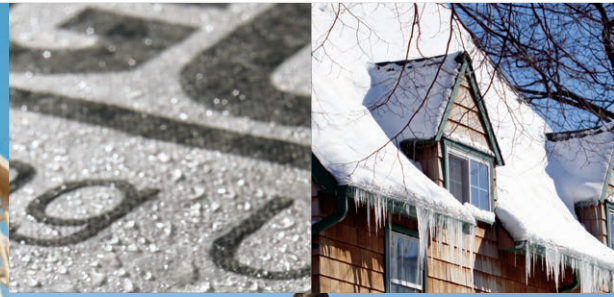

High performance roofing underlayment



RoofTopGuard II® outperforms the competition

- 5-layer polypropylene/polyethylene construction
- Guaranteed waterproof
- Can be installed 30% faster than the competition's equivalent underlayment
- Hurricane-proof: won't tear or rip in high winds
- 100% resistant to insects, vermin, mold, rot and the elements
- Lightweight
- Suitable for use under all roofing materials
- Can be left exposed to the elements for up to 6 months without degradation
- Exclusive FIBER-GRIP® slip-resistant surface
- 50-year guarantee
- Customized logo printing available in up to 4 colours

RoofTopGuard II®: the latest technology for a high performance roofing underlayment



EASY
INSTALLATION

Easy Installation

Can be installed 30% faster than the competition's equivalent underlayment.



WEATHER
RESISTANT

High-Tech Protection – Hurricane-Proof

Guaranteed waterproof and 100% resistant to insects, vermin, mold, rot and the elements.



SAVE
TIME & MONEY

Save Time and Money

Its 5-layer polypropylene/polyethylene construction results in high strength, while maintaining low weight (under 43 pounds per roll). This makes it suitable for use under all roofing materials. Its 60" width and 10 square roll size speed up installation and minimize seams, making installation safer, faster and easier.



LIGHTWEIGHT



You will find instructions for installing RoofTopGuard II® at rooftopguard.com



Safer, stronger, simply superior



Uncovered Exposure

Can be left uncovered and exposed to the elements for up to 6 months without degradation.



Superior Grip

RoofTopGuard II®'s exclusive "FIBER-GRIP®" surface is slip resistant and offers superior grip. Independent laboratory tests have shown that RoofTopGuard II® offers greater traction and slip resistance than standard roofing felts.



Unequaled Product Performance

RoofTopGuard II® meets or exceeds all national building code requirements (including those in Miami-Dade County) and consistently outperforms conventional underlayments. When it comes to product testing, our tests speak for themselves: strength, elongation, UV resistance, watertightness and water-vapor transmission.



WHEN EXCELLENCE
MATTERS

The world of high performance roof underlayments

RKW | RoofTopGuard®

RoofTopGuard II® exceeds all national building code requirements

Certifications / Approvals

Miami-Dade County	Acceptance No. 12-0426.01
ICC-ES	ICC ESR-2928
Florida Building Code	FL12145

Specifications

Roll size	60" x 200'
Roll weight	43 lbs
Coverage	9 1/3 squares
Thickness	12 MIL
Rolls per pallet	33
Pallet weight	1550 lbs
Colors	Gray

RKW North America, Inc.

270 Reasonover Drive
Franklin, KY 42134 | USA
T +1-270-598-77-00
F +1-270-598-77-11



rkw-group.com