


RKW RoofTopGuard® Breather

Breathable roofing underlayment

Discover RKW RoofTopGuard® Breather: Consisting of non-woven and film layers, the new breathable underlayment RKW RoofTopGuard® Breather is revolutionary thanks to its significantly higher permeability and water resistance as com-

pared to other breathable products. RKW RoofTopGuard® Breather improves the indoor climate of buildings and helps reduce inside moisture in the roofing system that could cause mold, mildew, and expensive structural damage.

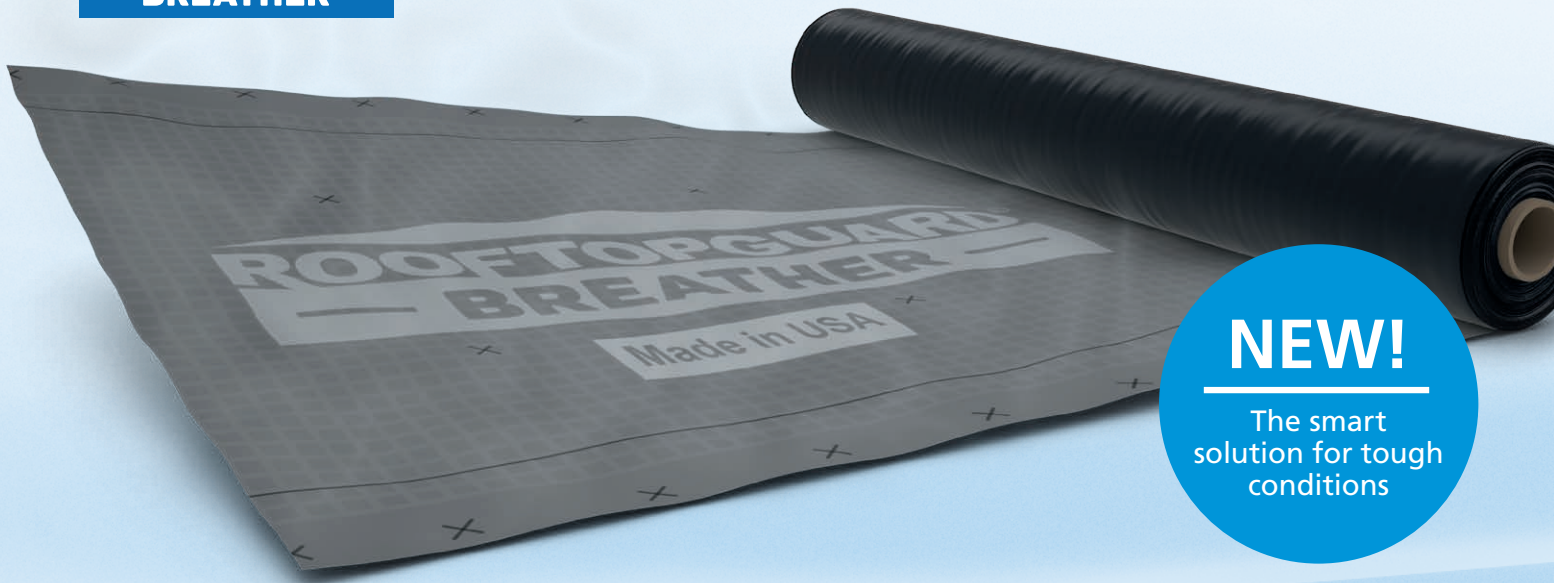

NEW!

The smart solution for tough conditions

Breathable and 100% waterproof

- Better indoor climate in buildings
- Prevents expensive structural damage like mold

Up to 30% faster installation

- Ultralight weight (only 25 lb per roll)
- About 96 square meters per roll (10 squares)

Unparalleled safety on steeper-pitched roofs

- Specially engineered Fiber-Grip® surface
- Available in peel-off or self-adhesive version

Extremely resistant, hurricane-tested

- Tearproof even in strong winds

Outdoor storage possible up to 6 months

- Delivered in rolls
- Resistant to insects, vermin, rotting, mold

Outstanding price-performance ratio

Excellent tear resistance, safe to walk on

Do you have any questions or require a sample?
Please don't hesitate to call us on +1-270-598-7700 or
e-mail sales.na@rkw-group.com

	Standard	Unit	Value
Weight	EN ISO 2286-2	g/m ² oz/yd ²	120 3.54
Tensile strength MD	EN ISO 527	N/inch	135
Tensile strength CD	EN ISO 527	N/inch	90
Tensile elongation MD	EN ISO 527	%	120
Tensile elongation CD	EN ISO 527	%	70
WVTR 85%RH@23°C	Lyssy ASTM 398	g/m ² x 24h	1500
Sd-value	EN 12572 climate C	m	0.02
Permeance	ASTM E96	Perm (inch-pound)	180

Highest performance
by the European leader of breathable films

Packaging & Delivery Service:

- Rolls wound on cardboard cores with an inner diameter of 3 inches
- Widths: 63 inches, others on request
- Roll length: 65 yd, others on request



RKW North America, Inc.

270 Reasonover Drive
Franklin, KY 42134 | USA
T +1-270-598-77-00
F +1-270-598-77-11